

The Sprinter Dolly Technical Specifications

Sprinter Dolly with standard platform



Weight:	
Basic configuration, incl. turnstile, pneumatic wheels	
pushbar and steering rod	43,6 kg/96.1 lbs
Dimensions:	
Length:	137 cm/4'6"
Width:	79 cm/2'1"
Height:	
Euro adapter (with pneumatic wheels above floor):	28,3 cm/11.4"
Max. Payload Capacity:	300 kg/661 lbs

Sprinter Dolly with extended platform



Weight:	
incl. extended platform, turnstile, pneumatic wheels	47,8 kg/105.4 lbs
Dimensions:	
Length:	137 cm/4'6"
Width:	109 cm/3'7"
Height:	
Euro adapter (with pneumatic wheels above floor):	28,3 cm/11.4"
Max. Payload Capacity:	300 kg/661 lbs

Sprinter Dolly with skate wheels on Master Track



Weight:	
incl. extended platform, turnstile, pneumatic wheels	see above
Dimensions:	
Length:	see above
Width:	see above
Height:	see above
Euro adapter (with skate wheels/Master Track):	33,5 cm/1'1.2"
Max. Payload Capacity:	see above



Parts included in delivery:

Chassis	1 piece
Standard platform	1 set (2 pieces)
Extended platform	1 set (2 pieces)
Push bar	1 piece
Towing/Steering bar	1 piece
Pneumatic wheels	1 set (4 pieces)
Track wheels	1 set (4 pieces)
Turnstile mount	1 piece

Unlimited freedom of creativity



The Sprinter Light Dolly System



Movie Tech AG
Martin-Kollar-Str. 9
D-81829 München

Tel: +49 (0) 89/43 68 91 3

Fax: +49 (0) 89/43 68 91 55

e-mail: info@movietech.de

www.movietech.de

Technical details are liable to variations • Copyright by Movie Tech AG



The Sprinter Light Dolly System


...a real quick-change artist!

At last, here it is. The brand-new "Sprinter" dolly by Movie Tech. It is featured with a lot of innovations which are not common in its class. Beside these highlights it offers a number of improvements which simplify the operation on the set enormously.

The revolutionary thing of the Sprinter dolly is its steering system. With the new Front Wheel Steering the dolly is manoeuvrable like a car.



Another highlight of the Sprinter Dolly is the possibility to realise an extremely low camera position. That can be done thanks to the variability of the platform and an appropriate low rig.

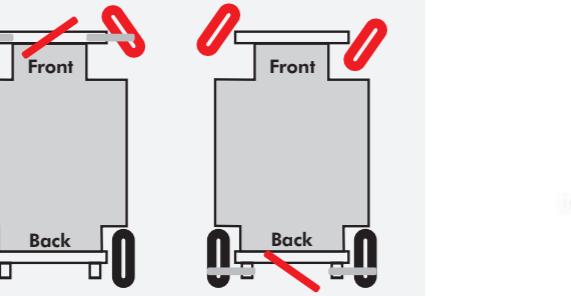

The FWS Steering by Movie Tech

That means: steering rod to the left = wheels to the left (and vice versa). Steering rod and push-bar can be mounted by insertion either at the front- or at the back of the dolly. Thereby the grip never gets in the way of the camera.

...and its Accessories




Diverse Ball Adaptors



System Low Rig



4-Way Leveller



Range of Bazookas









Range of Seat Arms



Light Weight Aluminum Jib



Mini Jib Arm

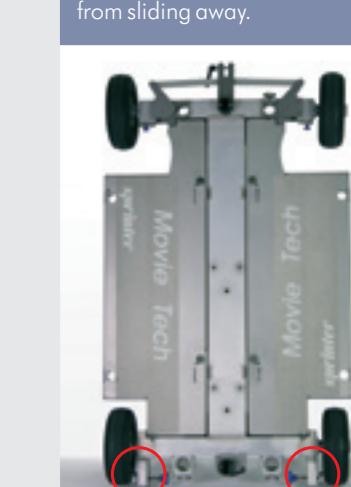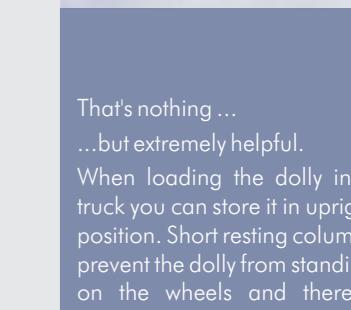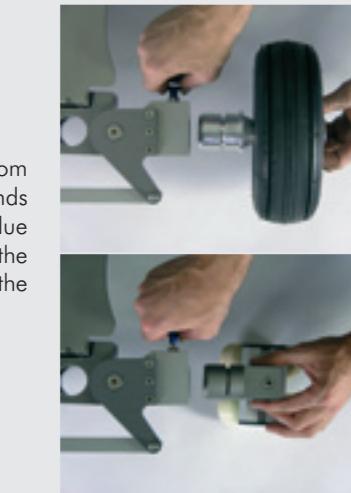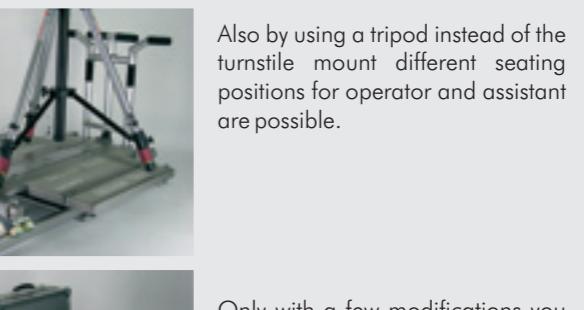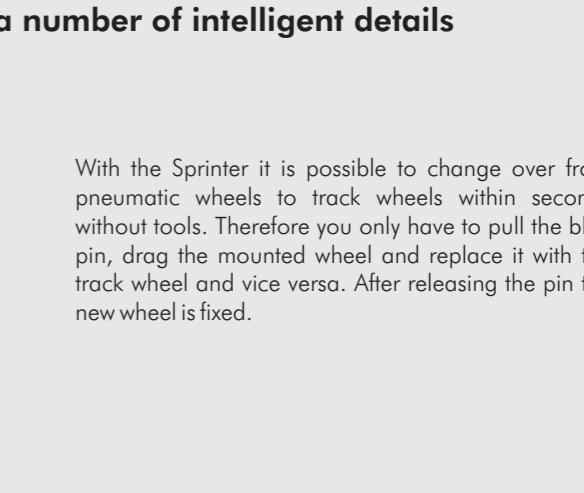

...a number of intelligent details

With the Sprinter it is possible to change over from pneumatic wheels to track wheels within seconds without tools. Therefore you only have to pull the blue pin, drag the mounted wheel and replace it with the track wheel and vice versa. After releasing the pin the new wheel is fixed.

Also by using tripod instead of the turnstile mount different seating positions for operator and assistant are possible.

Only with a few modifications you can transform the Sprinter into a trolley, which, for example, can easily haul your camera to the set.

Thanks to fixing elements the mounting of the platform can be done very quickly and smoothly.