

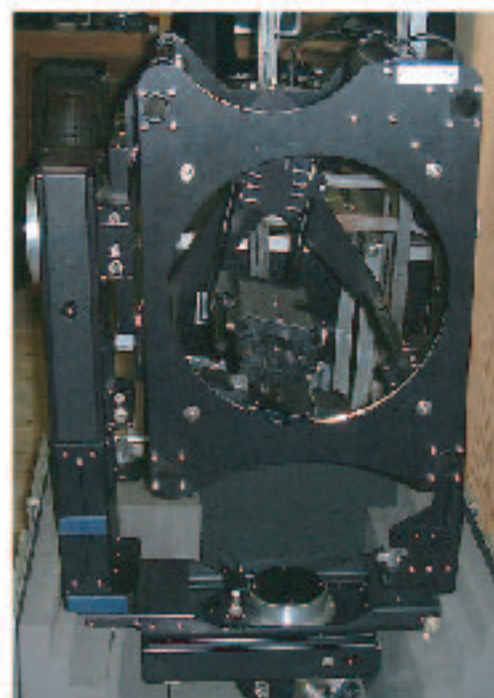



MINIMOTE (3axis)

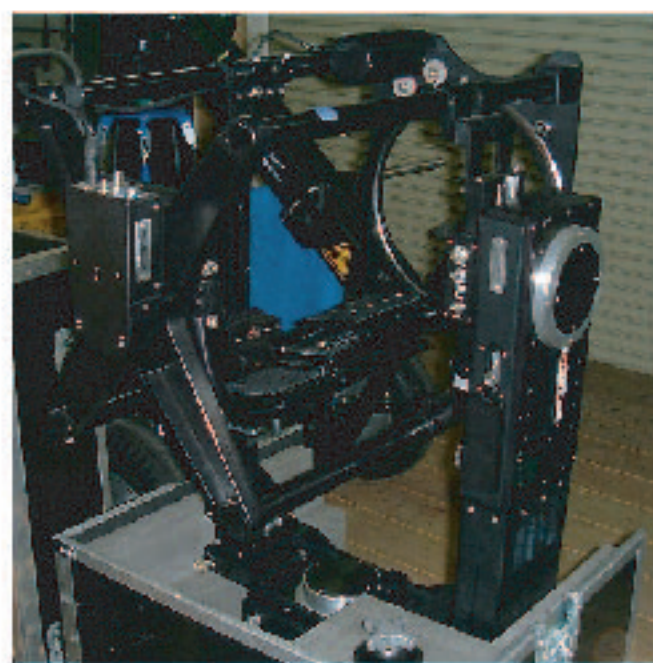

正面図

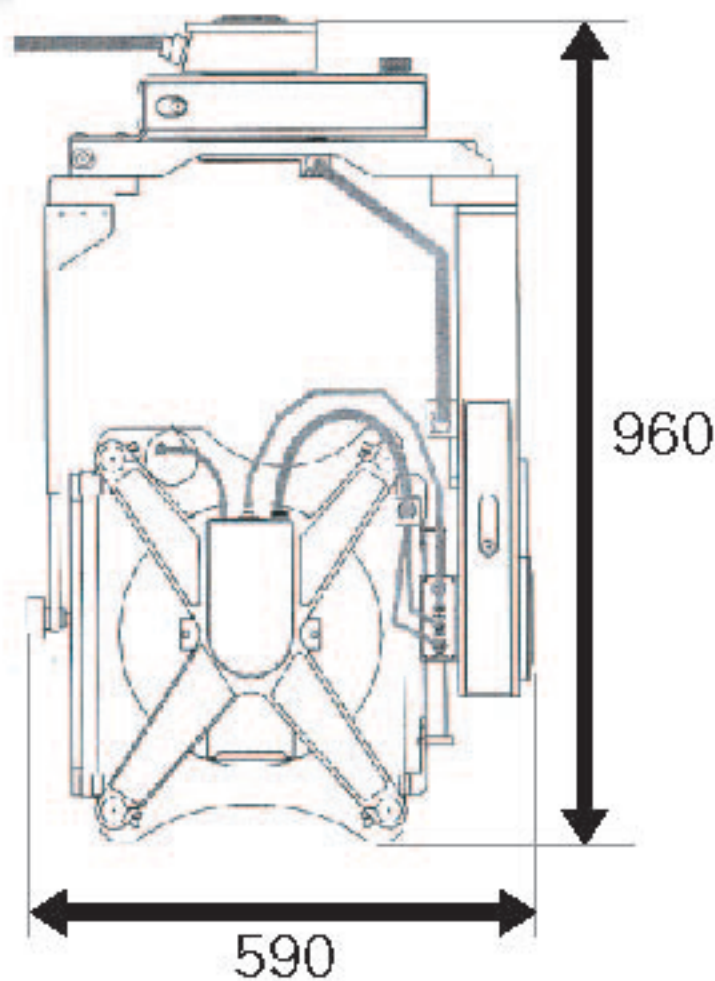





斜俯瞰図

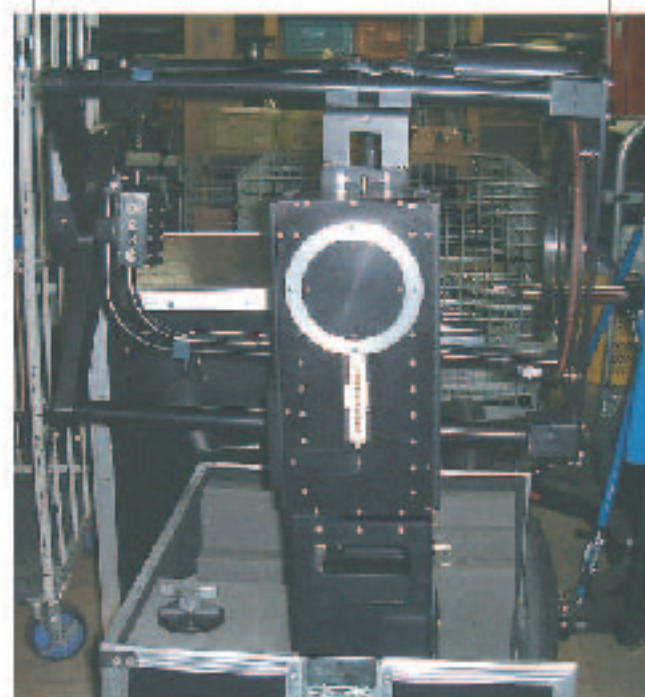

側面図

MINI-MOTE

2-AXIS REMOTE HEAD

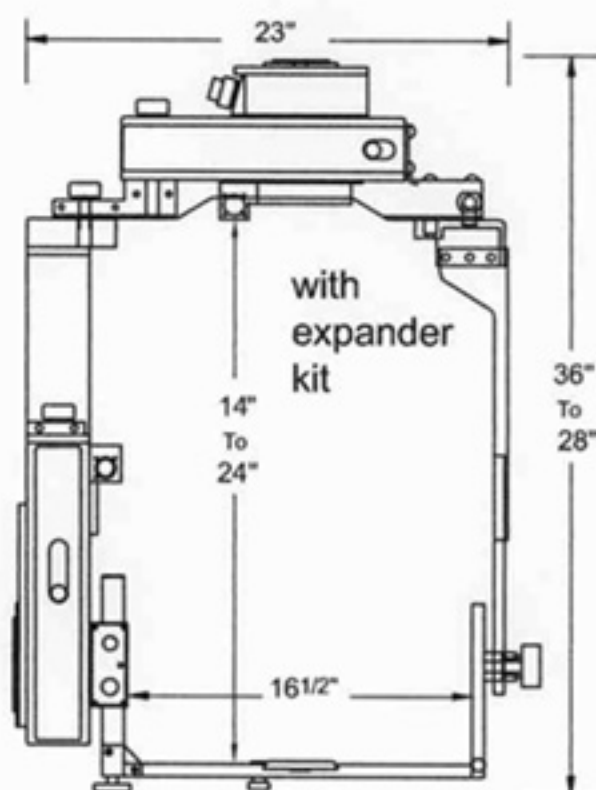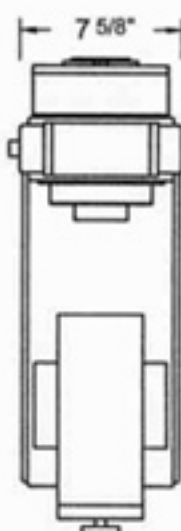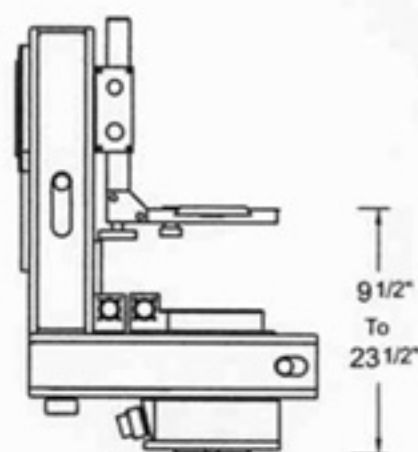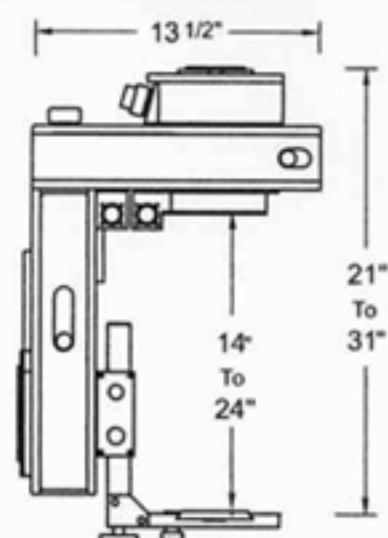

Technical Specs

Head Axes

Pan & Tilt: 360° continuous, 0-150°/sec.
Overslung-Underslung-Horizontal

Head Weight

44 lbs.

Max. Camera Weight

60 lbs. or 190 lbs. with expander kit

Head Control

Wheels, joystick, pan-bar

Lens Control

Preston FI+Z

Environmental

-22° F to 120° F

Power Requirements

18-28 VDC (3A max)
Generator, battery, AC

Setup Time

30 minutes

Technician Required

Yes, or trained A.C.

Cameras Accepted

All film, video and HI-DEF

Wireless

